


Luminey in collaboration with Sunwoda Energy, is bringing **Lithium Iron Phosphate (LiFePO<sub>4</sub>) Batteries** to Pakistan. Trust in our expertise & **take charge** of your energy future today.




## Conventional

## Atrix

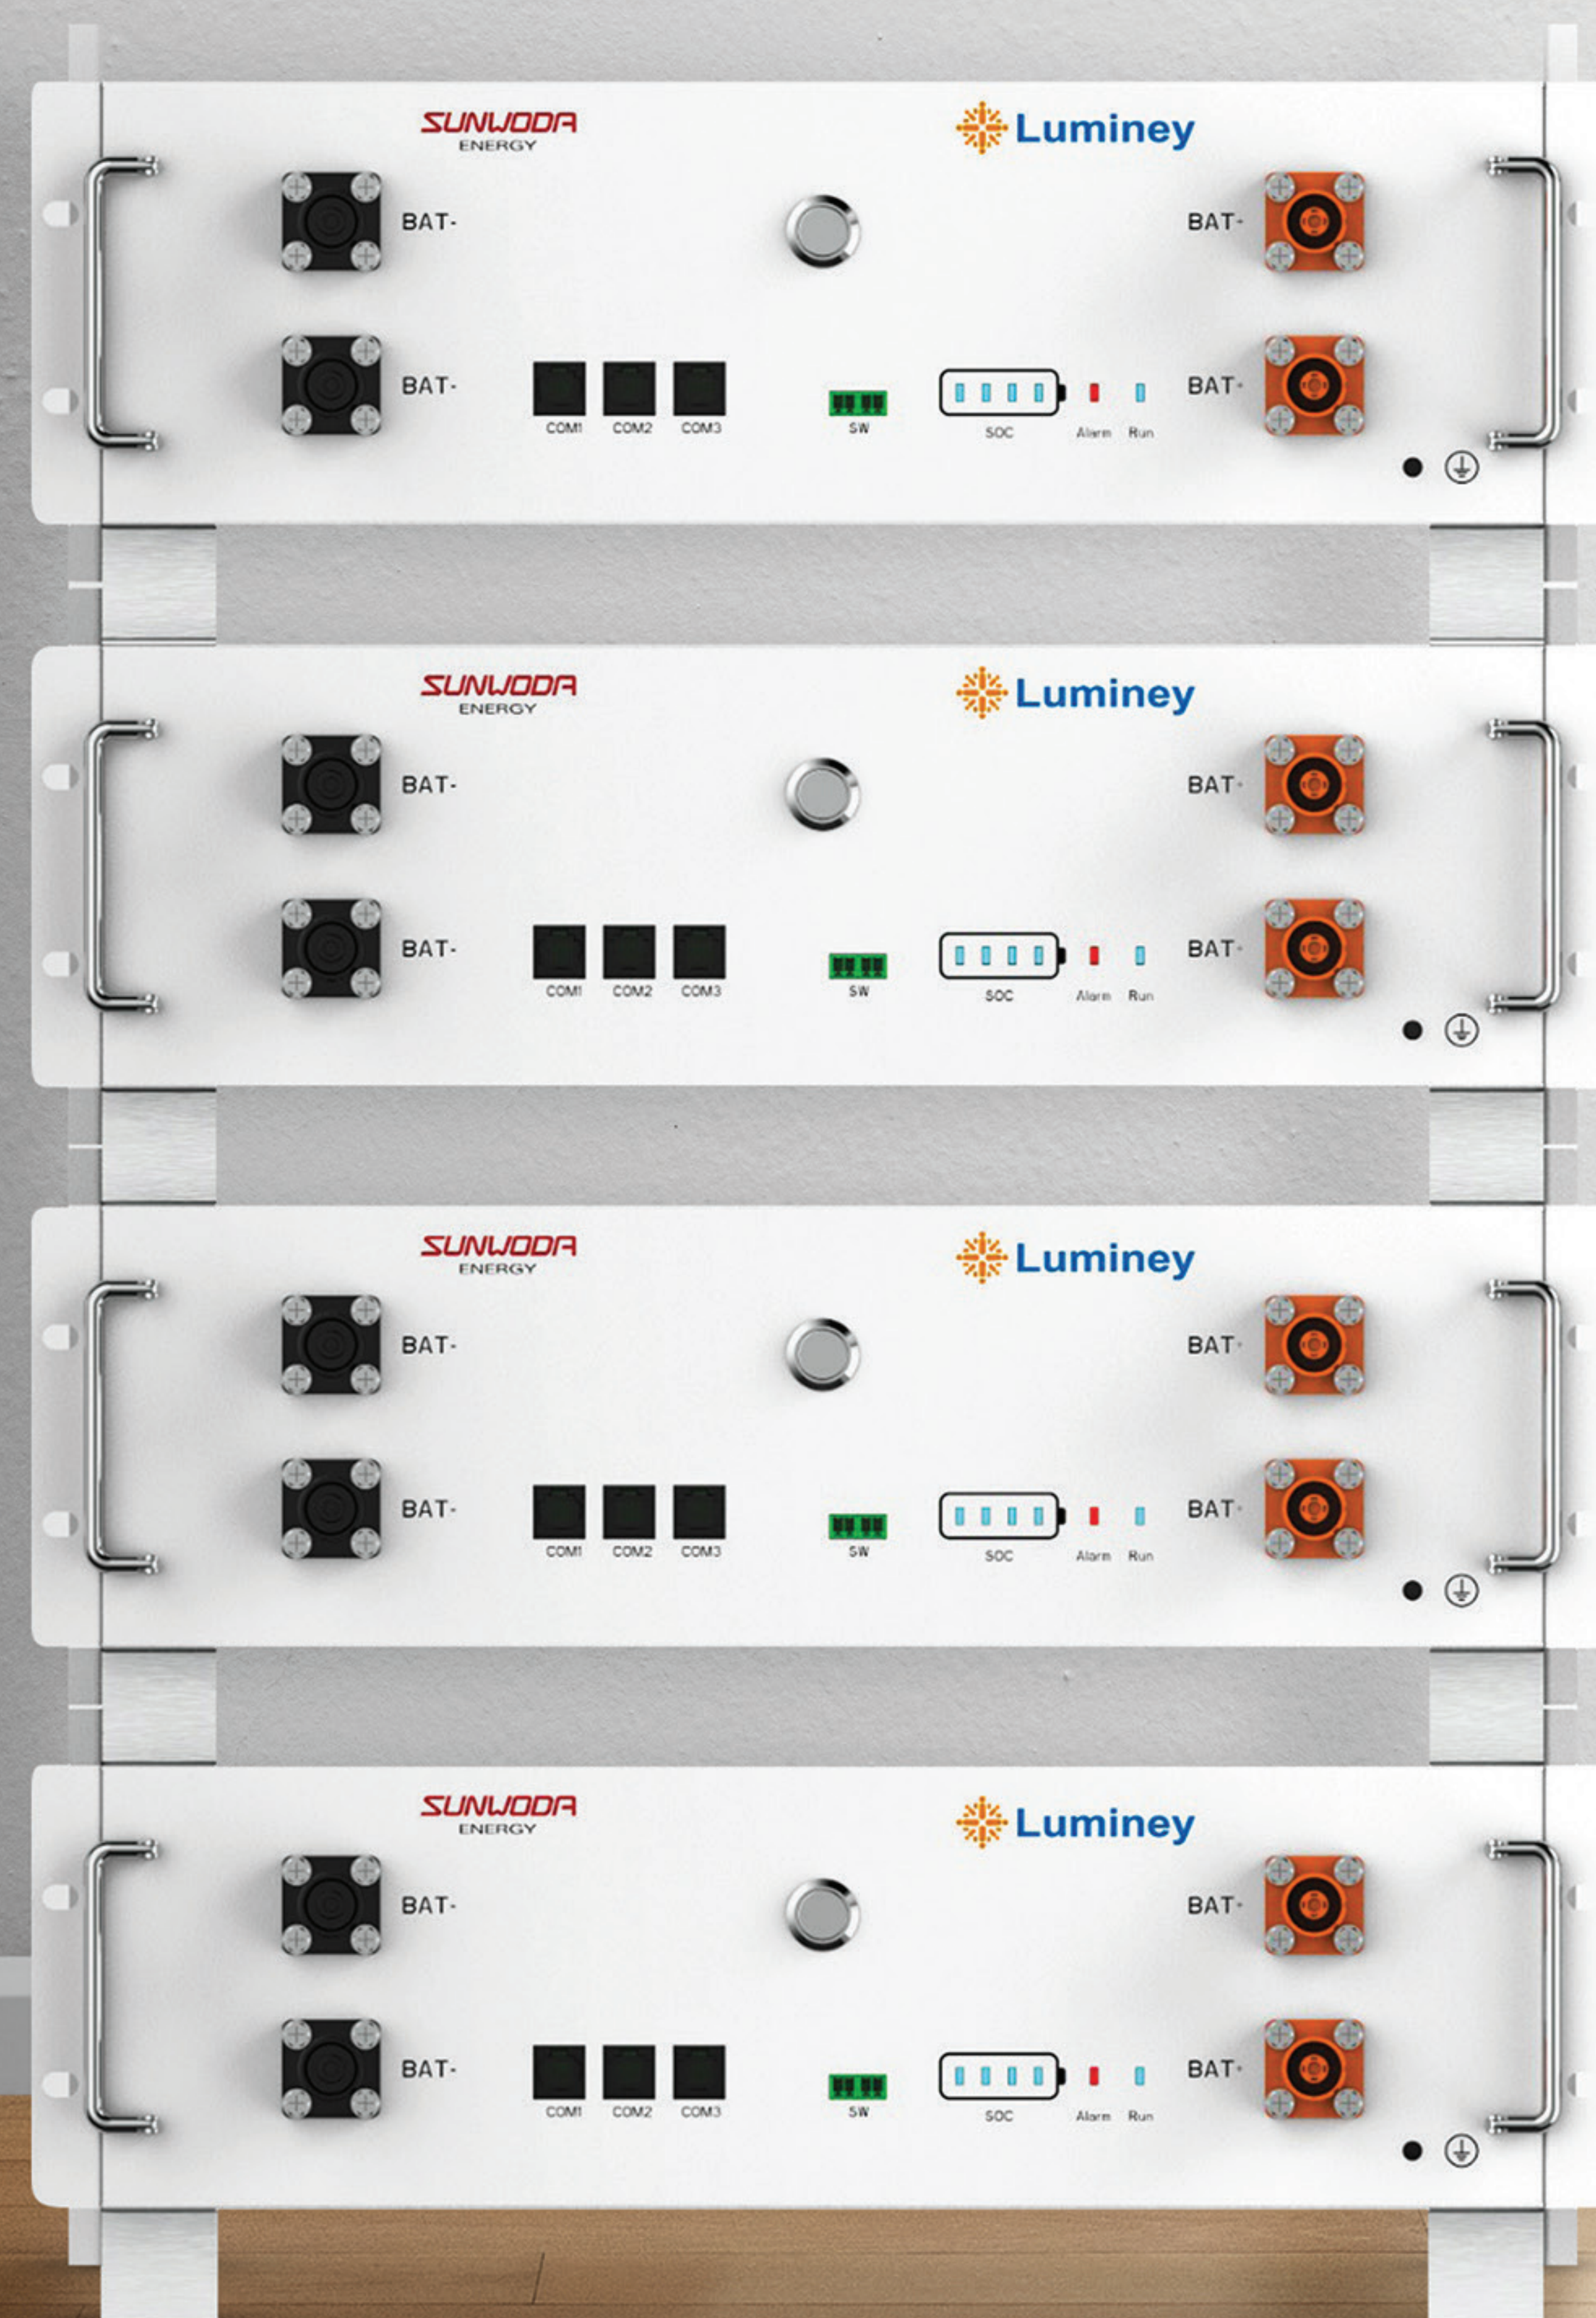

### Flexible Application

Optimized for stack and build in cabinet installation

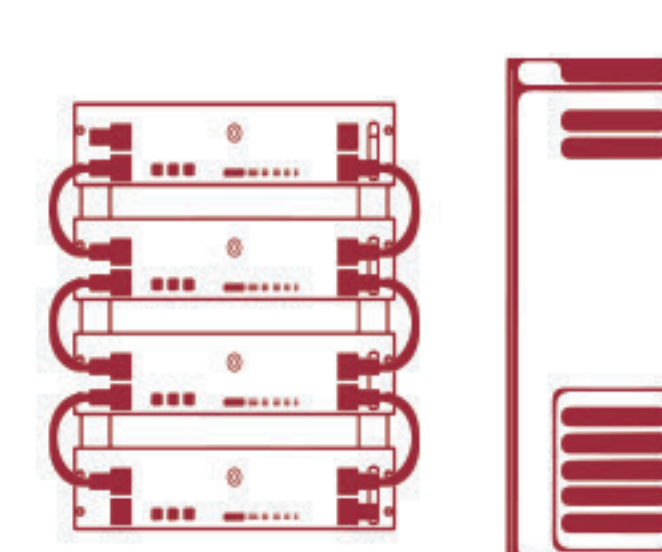



### Easy to Install

Plug and play  
Compact and light  
2 Persons installation



### Excellent Performance

100% DOD  
Operate at -10° C without any limitation and attenuation (optional)

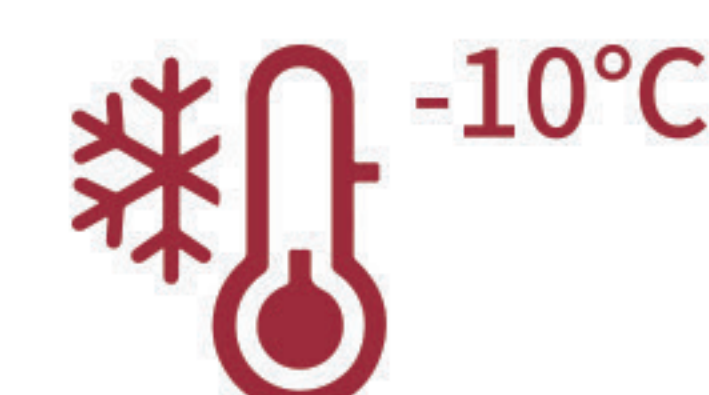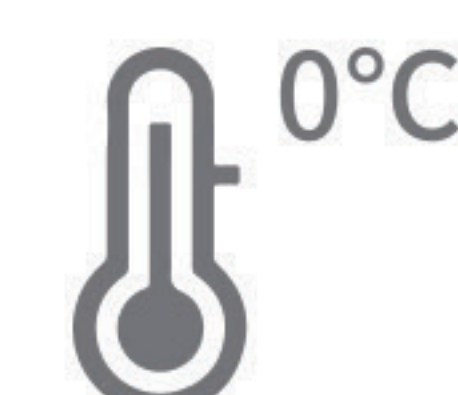

### Battery APP (Optional)

Real time monitoring  
Remote maintenance and upgrades (optional)








## Specifications

Model	Atrix-5	Atrix-10	Atrix-15	Atrix-20
Nominal Energy	5kWh	10kWh	15kWh	20kWh
Usable Energy (100% DOD)	5kWh	10kWh	15kWh	20kWh
Rated Voltage	51.2V	51.2V	51.2V	51.2V
Charge/Discharge Cut Off Voltage	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V	44.8V~55.2V
Roundtrip Efficiency	>98%	>98%	>98%	>98%
Rated Charge/Discharge Current	50A/100A	100A/100A	150A/150A	200A/200A
Max. Cont. Charge/Discharge Current	100A/100A	180A/100A	200A/200A	200A/200A
Communication Interface	CAN 2.0/RS485			
Scalability	Max. 24 in parallel, Max. 120 kWh			

- |   |   |
|---|---|
| 1 Life Cycles = 6000 cycles             | 8 Anti Expansion Design                                       |
| 2 Rated Charge/Discharge = 0.5C/1C      | 9 Built in Heater   |
| 3 Max. Cont. Charge/Discharge = 1C/1C   | 10 Quick Plug and un Plug DC terminal                         |
| 4 DOD = 100%                            | 11 Communication cables and dc wires                          |
| 5 Installation = Wall Mount /Rack mount | 12 Inverex , Solar Max , Knox, Solis, Growatt (CAN 2.0/RS485) |
| 6 Warranty = 5 years                    | 13 With built-in flexible Battery Rack                        |
| 7 Battery type = liFePo4                |   |

## Operating Conditions

Installation Location	Indoor
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Storage Temperature	-22°F to 140°F (-30°C to 60°C)
Humidity	10% to 90%, non-condensation
Dimensions	482*135*433/Pack (W*H*D, mm)
Weight	45kg/90kg/135kg/180kg
Enclosure Protection Rating	IP20
Altitude	<2000m
Cooling	Natural Convection
Certificates	IEC62619/CE/CEI 0-21/UL1973/ FCC/UL9540A/UN38.3

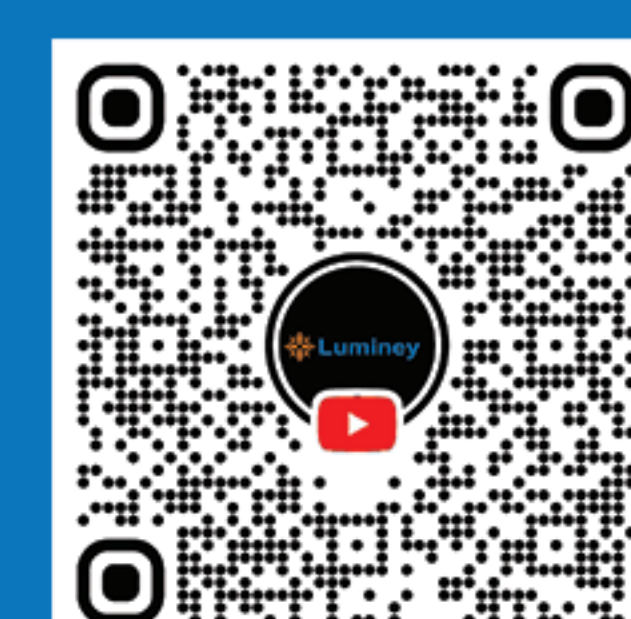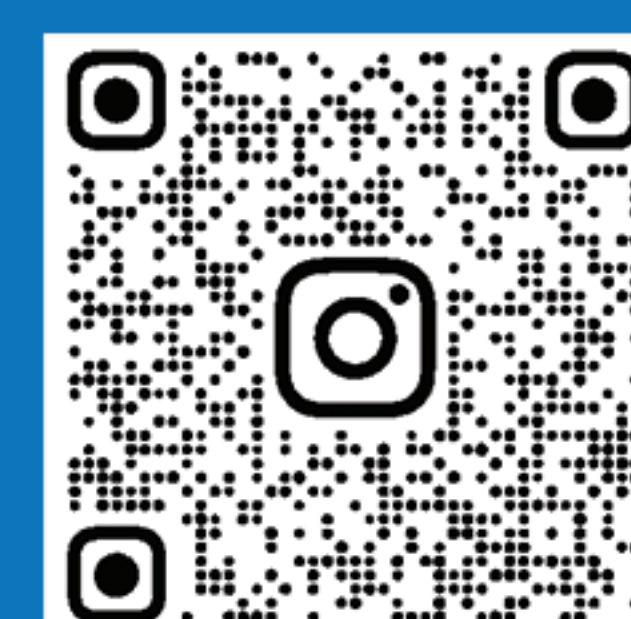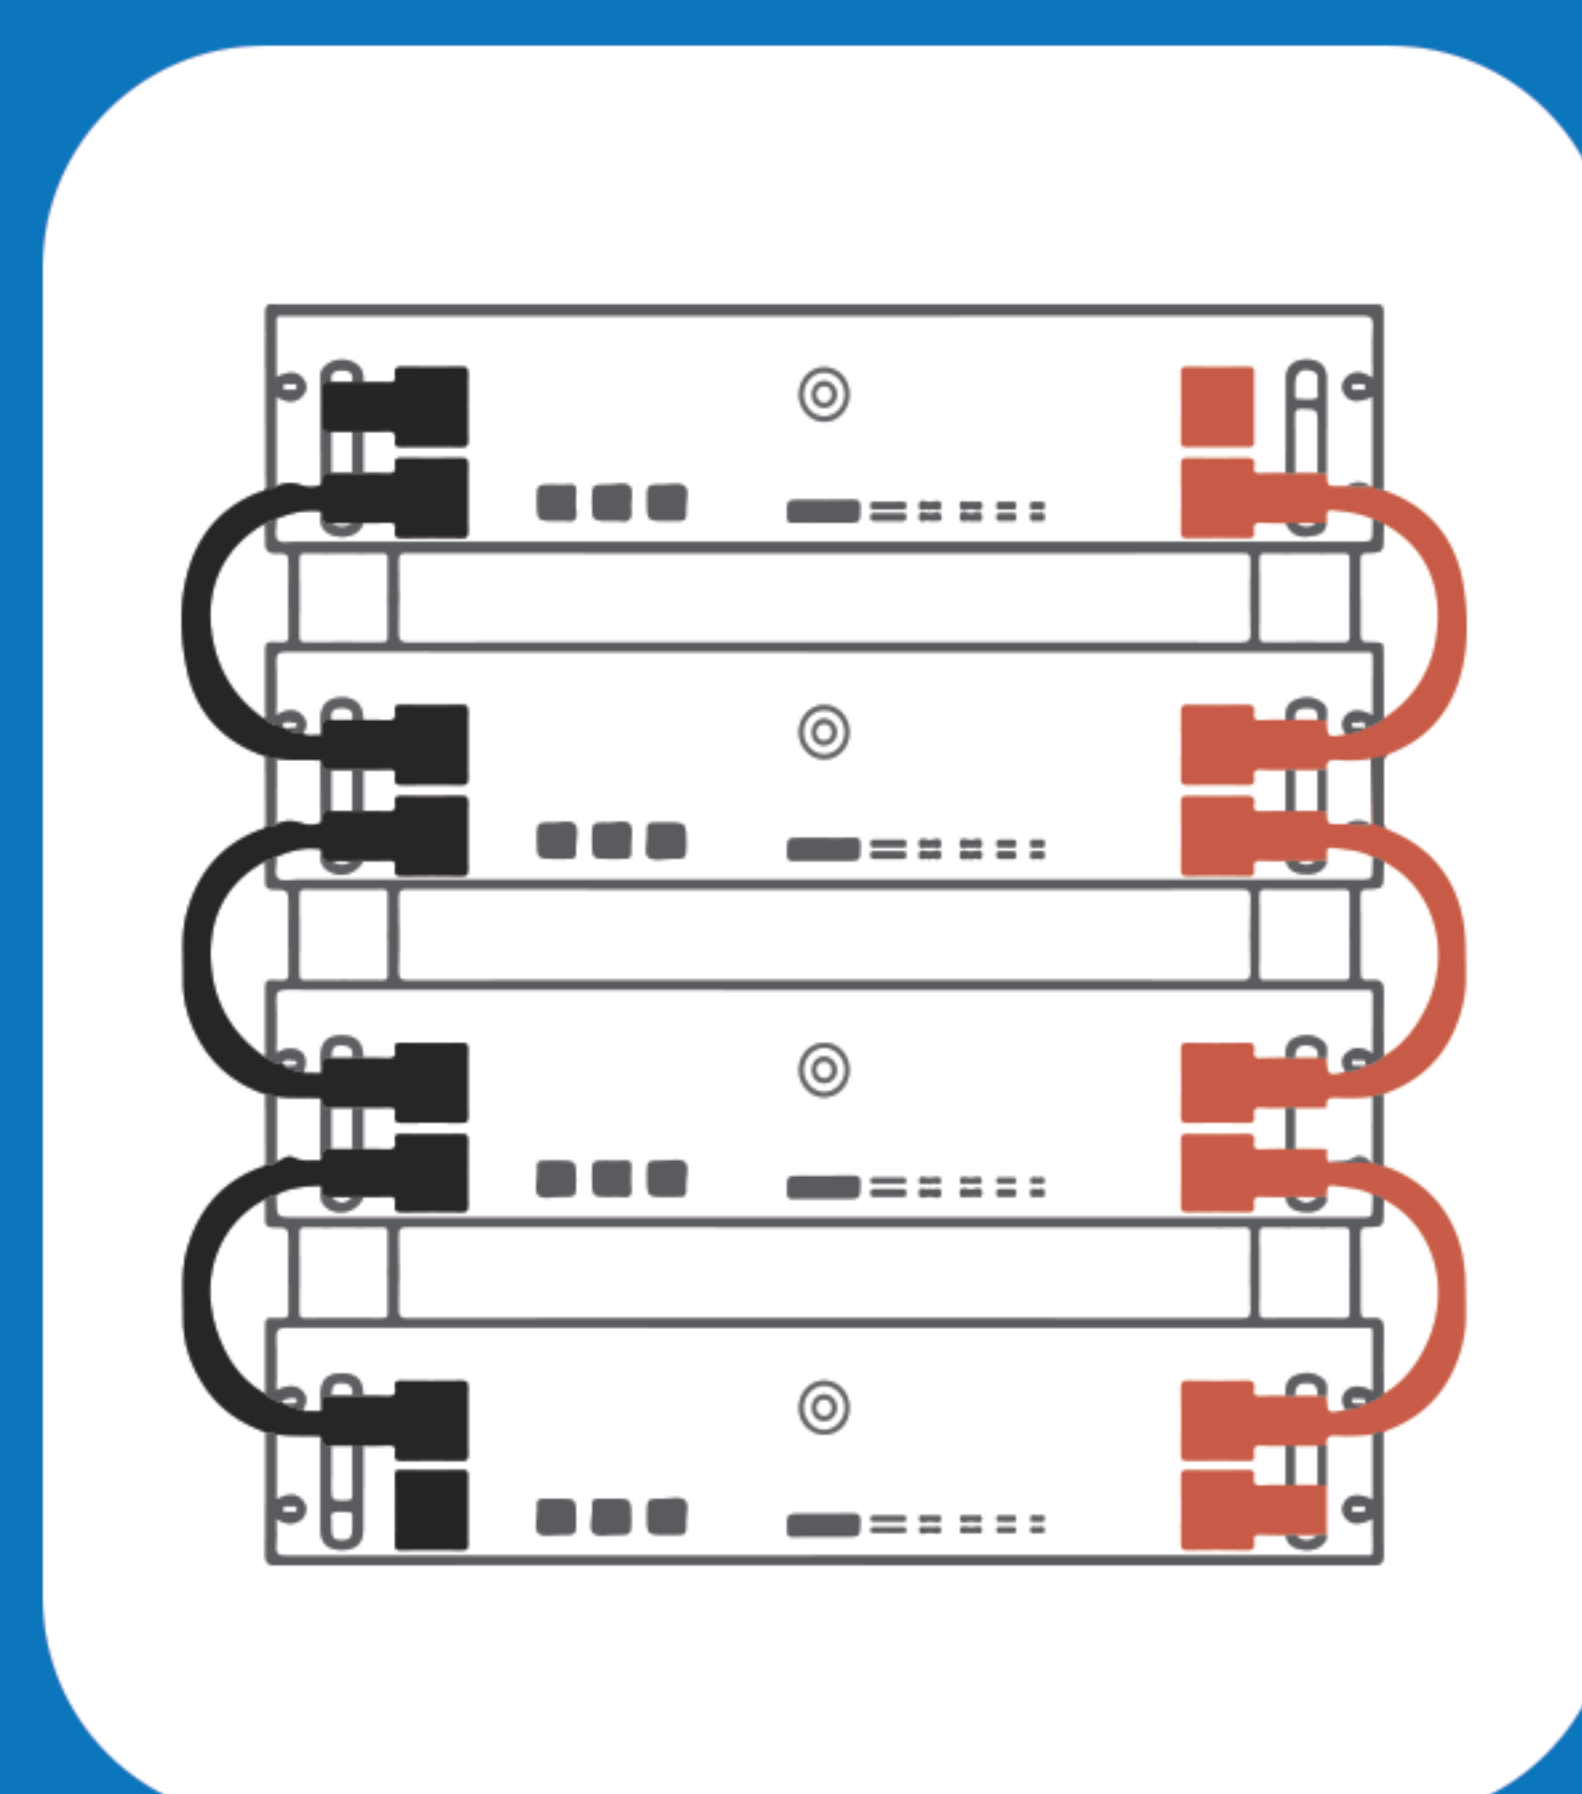

Terms and conditions apply



[www.luminey.com](http://www.luminey.com)



[info@luminey.com](mailto:info@luminey.com)