

STELLAR

3N+72 Dual-Glass Module

650W-685W


Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values
-  Infinite Technology



red dot winner 2023

Warranty partner



Product Warranty



Performance Warranty

IEC61215/IEC61730
IEC61701/IEC62716

ISO9001:ISO Quality Management System
ISO14001:ISO Environmental Management System
ISO14064:Greenhouse Gas Verification Statement
ISO45001:ISO Occupational Health and Safety Management System



685W
Output

25.4%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

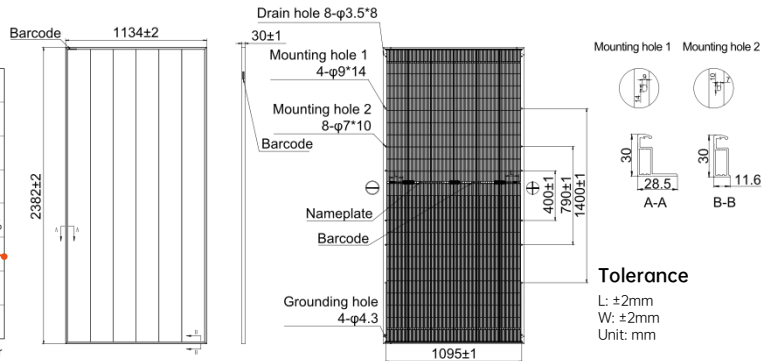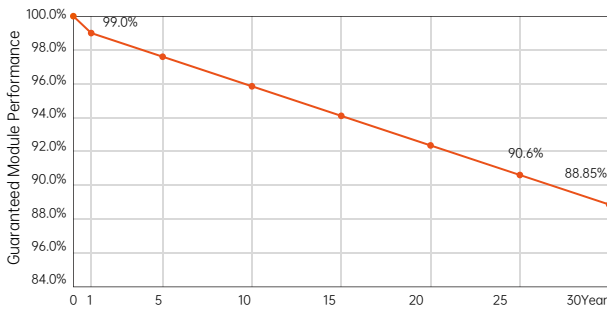

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ +3%

Module Type	AIKO-A650-MDE72Dw			AIKO-A655-MDE72Dw			AIKO-A660-MDE72Dw			AIKO-A665-MDE72Dw			AIKO-A670-MDE72Dw			AIKO-A675-MDE72Dw			AIKO-A680-MDE72Dw			AIKO-A685-MDE72Dw		
	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
P _{max} [W]	650	520	685	655	524	690	660	527	695	665	531	700	670	535	705	675	538	710	680	542	715	685	546	720
V _{oc} [V]	54.90	51.23	54.90	55.00	51.33	55.00	55.10	51.43	55.10	55.20	51.53	55.20	55.30	51.63	55.30	55.40	51.73	55.40	55.50	51.83	55.50	55.60	51.93	55.60
V _{mp} [V]	44.79	42.98	44.79	44.89	43.07	44.89	44.99	43.16	44.99	45.09	43.25	45.09	45.19	43.34	45.19	45.29	43.43	45.29	45.39	43.52	45.39	45.49	43.61	45.49
I _{sc} [A]	15.27	13.08	16.08	15.33	13.14	16.14	15.39	13.20	16.20	15.45	13.26	16.26	15.52	13.32	16.33	15.59	13.38	16.39	15.66	13.44	16.46	15.73	13.50	16.52
I _{mp} [A]	14.52	12.10	15.29	14.60	12.16	15.37	14.68	12.22	15.45	14.75	12.28	15.52	14.83	12.34	15.60	14.91	12.40	15.68	14.99	12.46	15.75	15.07	12.52	15.83
Module Efficiency	24.1%			24.2%			24.4%			24.6%			24.8%			25.1%			25.2%			25.4%		

Product Specification

Cell Type	N-Type ABC
Front Cover	2.0mm coated semi tempered glass
Rear Cover	2.0mm semi tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) +400mm, -200mm/±1400mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, 3 bypass diodes
Connector	MC4 Compatible/Original MC4-EVO2A
Weight	32.2kg±3%
Dimension	2382*1134*30mm
Package Detail	36pcs per pallet / 144pcs per 20'GP / 720pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class A



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
*Optional Munich Re coverage is available upon request
202603_V4.1_EN