


**6
YEARS
WARRANTY**
Terms & Conditions Apply

NOVA 12.6KW

HYBRID SINGLE PHASE SOLAR INVERTER

PV - 24000

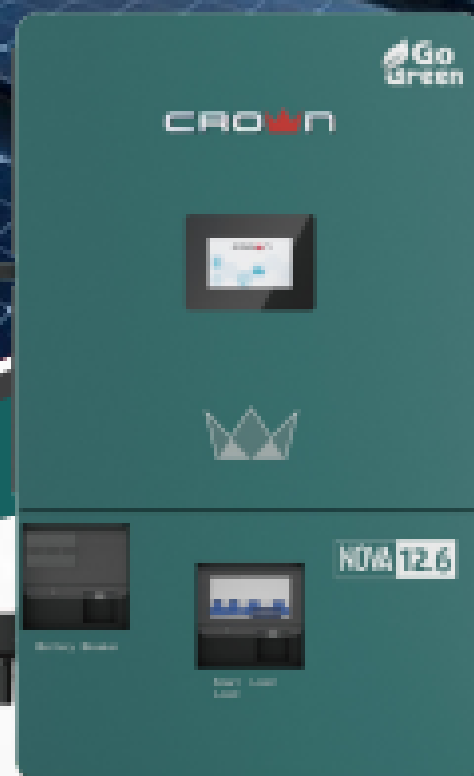

-  Dual MPPT design with four strings, each MPPT supporting a maximum current of 36A
-  Maximum 24KW PV input
-  Auto generator start and stop control
-  Separate generator (GEN) port
-  Dual AC output ports for multiple load connections
-  Maximum charging & discharging current, 250A
-  PV or AC or generator wake up battery
-  Up to 19.2KW GEN/AC coupling input
-  Integrated design with load and battery breaker
-  Supports up to 16 units in parallel



Dual MPPT Input



Dual Output



Max Efficiency 99%



LCD with Touch Screen



Battery Management System



Smart Cooling



Battery Breaker



Parallel Operations up to 16 Units



Technical Data

MODEL NAME	NOVA-12.6KW
Rated Power	12600VA/12600W
INPUT (PV/DC)	
Max. PV array power (W)	24000 (12000/12000)
Rated PV input voltage (V)	250
Number of independent MPPT inputs	2(2-2)
PV input voltage range (V)	100-400
MPPT voltage range (V)	120-440
Start-up voltage (V)	100
Max. PV input current per MPPT (A)	35/35
Max. PV short-circuit current input per MPPT (A)	44/44
Battery	
Compatible battery type	Lithium-ion/Lead-Acid
Rated battery voltage (V)	48/51.2
Battery voltage range (V)	46.4-58/58.4-68
Max. charging / discharging current (A)	250
Max. charging / discharging power (W)	12600
Force wake up battery from PV and Grid function	YES
Grid	
Rated AC voltage (V)	230
Acceptable Input Voltage Range (V)	90-280
Rated AC frequency (Hz)	60/50
Rated AC input current (A)	100
Rated AC input power (W)	24000
PF	0.99
THDI	<3%
Max. continuous AC passthrough current(A)	100
UPS	
Rated output power (W)	12600
Rated output voltage (V)	230
Rated output current (A)	50
Rated output frequency (Hz)	50/60
Surge power, duration	2Pa, 5s
Switching time (UPS)	<7ms@Single; <10ms@Parallel
Wave form	Sine wave
THDV	3%
GEN	
Acceptable input voltage range	230
Max. AC input voltage (V)	280
Max. AC input current (A)	63
Rated input frequency	50Hz/60Hz (Auto-detection)
Transfer time	<10ms@Single; <10ms@Parallel
THDV	<3%
Overload protection	5s@1150% load /10s@1100%-150% load
Efficiency	
Max. efficiency	93.50%
Max. charging / discharging efficiency	93.00%
Max. MPPT efficiency	99.00%
Protection	
PV reverse polarity protection(Y/N)	YES
Over current / voltage protection(Y/N)	YES
AC Short-circuit current protection(Y/N)	YES
Grid monitoring(Y/N)	YES
DC switch(Y/N)	YES
DC / AC Surge protection Type III	Type III
Battery reverse polarity protection(Y/N)	YES
General	
Dimensions, D*W*H (mm)	130*230*830
Weight (Kgs)	40

Product specifications are subject to change without further notice.